

STEREO IDPU FM2 Vibration Re-Test Procedure
Document # IMP-626-DOC

Written by: W. Donakowski

Revised By: J. McCauley

Approved by: D. Curtis

REVISION: -

DATE: 15 December 2004

1. OBJECTIVE

The objective of this vibration test is to subject the STEREO IDPU FM2 Instrument (hereafter referred to as the Unit Under Test, UUT) to GEVS Minimum Workmanship vibration levels, qualifying the general mechanical integrity of the UUT at the component level, and verifying the UUT is capable of maintaining functionality following vibration. Only the FM2 instrument will be verified in this matter. The FM2 instrument has seen sufficient alteration (specifically, rework of the LVPS) since its initial vibration to require verification. The FM2 instrument was vibrated and has remained unaltered.

The UUT will be the fully assembled IDPU FM2, including the housing and various circuit boards in flight configuration. The unit will be given a CPT prior to and following vibration testing to verify functionality.

Test will be performed for the FM2 IDPU by Quanta Labs (Santa Clara, CA) October of 2004.

2. PERSONNEL

Test Attendees:

Test Conductors _____
(UCB) McCauley

Test Engineer _____
(Quanta Labs)

3. REFERENCE DOCUMENTS

APL Document APL 7381-9003 Rev A
UCB STEREO/IMPACT Boom Verification Plan
IMP-595-DOC STEREO IDPU FM2 Vibration Report

4. VIBRATION TEST LEVELS

The vibration spectrums, levels, and durations for this test will be per Addendums. Test shall be run in all three axes, applied independently.

Flight Units will be vibrated as provided in GEVS SE for Component Minimum Workmanship (page 2.4-20).

5. PASS/FAIL CRITERIA

UUT has successfully passed vibration testing if the unit is not degraded mechanically, functionally, or structurally. Success criteria shall consist of:

- No lost of functionality in IDPU function or utility between pre- and post-vibration CPTs. Comprehensive Performance Tests (CPTs) will be performed at UCB/SSL before testing commences and after testing is complete.
- No significant change in pre- and post- sine sweep signatures
- No permanent deformations, movements, or degradations
- No loss of connectivity of cable harness (measured before and after each test), conductivity must be maintained

Verification will consist of visual inspections, inspection of accelerometer output data, and acceptable functional CPTs. Note: it is not possible to codify a completely comprehensive PASS/FAIL Criteria for this type of Vibration Data. Test Conductor along with UCB/SSL STEREO Project Manager shall evaluate all test data.

6. REQUIRED HARDWARE ITEMS FOR TEST

UUT Consisting of IDPU Assembly. (Items removed/not in place for Vibration Testing include Thermal Blankets.)

All Flight Items are in final Flight configuration.

7. TEST ABORT AND REAL TIME ACTIVITY ASSESSMENT

Testing shall continue with the goal of a one (1) day test cycle. Minor anomalies will be evaluated and, where prudent, fixed or alleviated in an attempt to continue testing. Examples of minor anomalies include temporary loss of accelerometer data, minor problems with hardware (cable movement) or problems with shaker facility. Disposition of minor anomalies will be made by Test Conductors at test site.

Significant anomalies will result in abort of further testing. Abort decisions will be made only after consultation with STEREO Project Manager. The UCB Test Engineer has authority to stop testing if deemed damage may be occurring to the hardware, the testing equipment functioning is suspect, output data is questionable, or the test is not compatible with this procedure.

All anomalies shall be reported as part of standard Project Problem/Failure Reporting.

8. POST-VIBRATION TESTING at SSL

UUT success in vibration testing will be demonstrated at SSL after the completion of this test sequence by:

- CPT of IDPU without anomalies

STEREO IDPU FM2 VIBRATION RE-TEST PROCEDURE	IMP-626-DOC, Rev. -
--	----------------------------

9. TEST PREPARATION ACTIVITIES at UCB/SSL

<i>Initials</i>	<i>Description.</i>
	Complete assembly of UUT. Photograph.
	Install UUT Test Harness. Perform CPT of IDPU
	Double bag UUT, leaving access to accelerometer locations and leads to internally mounted accelerometers. Photograph.
	Transport UUT and support hardware to test facility.

INSPECTION POINT

INSTRUMENT IS COMPLETE AND READY FOR SHIPMENT TO TESTING FACILITY

***INSPECTION POINT* DATA RECORDED BY:** _____

10. PRE-TEST ACTIVITIES at FACILITY

Prior to the start of each axis test:

<i>Z</i>	<i>Description.</i>
	Properly orient Vibration Table for test.
	Install control accelerometer on Vibration Table. Mark up figure to show actual placement. Label accelerometer CTL .
	Prepare Table Sine Survey . Load and verify control settings. Annotate data with appropriate Run#.
	Perform Table Sine Survey . Note any prominent resonance features.
	Perform RANDOM Vibration Run to verify working of table.
	Perform any other vibration runs at discretion of Test Conductor on empty vibration table. As a minimum, a Sine Survey and Random shall be performed to ensure adequacy of software, electronics, and the table itself.
	Mount UUT vibration fixture plate to Vibration Table.
	Install all fasteners in vibration fixture plate.
	Verify torque of all fasteners.
	Install accelerometer on UUT, locations per Figure 1. Mark up figure to show actual placement. Label accelerometers.
	Attach cables from accelerometers to recording amplifiers.
	Verify response of all accelerometers. Verify accelerometer assignments in system controller. Record accelerometer sensitivity in Table 1 below.
	Photograph vibration configuration.
	Assign run numbers for each vibration event and record.

***INSPECTION POINT* DATA RECORDED BY:** _____

STEREO IDPU FM2 VIBRATION RE-TEST PROCEDURE	IMP-626-DOC, Rev. -
--	----------------------------

Table 1: Accelerometer Sensitivity


Accel S/N	Sensitivity (pC/g @ 100Hz)
	Z

***INSPECTION POINT* DATA RECORDED BY:** _____

Sketch UUT and accelerometer locations in following drawings.

Note: A minimum of 6 accelerometers recording output data should be used.

INSPECTION POINT DATA RECORDED BY: _____

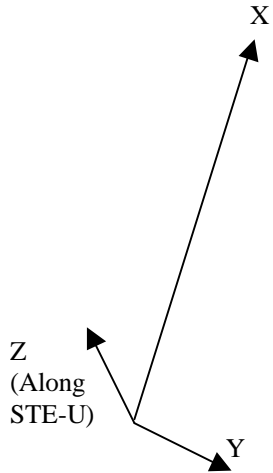

STEREO IDPU FM2 VIBRATION RE-TEST PROCEDURE	IMP-626-DOC, Rev. -
---	---------------------

10. VIBRATION TESTING

Choice of axis sequence is optional. Following satisfactory inspection of UUT on table, perform vibration testing per spectrums and sequencing listed in Addendum A. The UUT is to be “powered as launched” during vibration testing. Attach Harness to ETU IDPU, 28V supply, and monitoring equipment for all runs. Monitor current for transients.

Record Axis in the check boxes below:

	<i>Description</i>
	Install vibration fixture for UUT onto vibration table.
	Install UUT on vibration fixture, torque fasteners, as shown in Addendum E.
	Verify torque of vibration fixture fasteners.
	Verify proper mounting of accelerometers.
	Prepare Sine Survey #1 per Addendum A . Load and verify control settings. Annotate data with appropriate Run#.
	Perform Sine Survey #1 . Note any prominent resonance features.
	Prepare Sine Strength Test per Addendum B . Load and verify control settings. Annotate data with appropriate Run#.
	Perform Sine Strength Test . Calculate g loads on any resonance features.
	Prepare Sine Survey #2 . Load and verify control settings. Annotate data with appropriate Run#.
	Perform Sine Survey #2 . Compare to Preliminary.
	Prepare Random Vibration per Addendum C . Load and verify control settings. Annotate data with appropriate Run#.
	Perform Random Vibration : ramp slowly to full level (-12, -9, -6, -3, 0 dB). Dwell for acceptance duration per Addendum A at 0 dB.
	Prepare Sine Survey #3 . Load and verify control settings. Annotate data with appropriate Run#.
	Perform Sine Survey #3. Compare to Sine Survey #1.
	Record notes in the table on following page.

11. ON-SITE INSPECTIONS

Before, during, and after each vibration run, visual inspections are to be made to check hardware status. Test runs are to be aborted when hardware appears anomalous. Following each run, bolt torque measurements for bolts holding the UUT to the vibration plate shall be made to verify no backing out of bolts.

ADDENDUM A: VIBRATION SPECIFICATIONS: SINE SURVEY
Protoflight and Flight Units

Testing Sequences

Testing is to be performed in the following order in Z-axis only.

a.	Mounting on Vibration Table
b.	Visual Inspection
c.	Sine Survey #1
d.	Random Vibration
e.	Sine Survey #2
h.	Visual Inspection

Sine Survey (All Axes)

Frequency (Hz)	Acceleration
5-2000	0.25 g

Rate: 4 Octaves/Minute

ADDENDUM B: VIBRATION INPUTS: RANDOM VIBRATION SPECTRA

Table 7: Random Vibration Levels -axis

Frequency (Hz)	PSD Level
20	0.01 g ² /Hz
20 to 80	+3.0 dB/oct
80 to 500	0.04 g ² /Hz
500 to 2000	-3.0 dB/oct
2000	0.01 g ² /Hz

Overall Amplitude = 6.8 g rms

Duration = 60 seconds

